

WZ 8.18362


Push Chain Direct System with Push-Pull System

electrically driven, with push chain drive, die weight up to 40 tons



Advantages

- Safe, non-destructive die change of heavy dies
- Very small footprint
- Placement behind the press makes optimum use of the unused space
- (The press remains accessible from the front)High levels of automation can be achieved
- Can be combined with existing changing technology
- Two control variants with many options
- Modular design
- Simple operation via remote control
- Bevel gear motor



Application

The push chain direct system is adapted directly to the press and is suitable for handling heavy dies easily and quickly. The push chain direct system can be easily installed as it requires little space. Thus, it is ideally suited for both retrofitting and new constructions.

Description

The push chain direct system enables dies to be changed safely so that employees do not have to move about in the danger zone. The integrated pull-push chain allows the user to automatically extend and retract the die at the push of a button. The dies are moved at a speed of 33 mm/s. Moving at creep speed enables precise positioning of the dies in the press table. Different automation levels can be achieved with the option of direct integration into the machine control or two optional control variants. The push chain direct system makes it possible to combine different changing systems with minimal installation space.

Function

The push chain direct system is installed at the back of the machine table. The die is coupled to the push chain using a die adapter.

The push chain direct system allows the user to automatically retract, position, and extend the die at the push of a button on a remote control. An absolute encoder can be used to integrate sensors (for millimetre-precise die positioning) and possible stops into the control system.

Robust technology

The installed bevel gear motor is relatively lowwear and low-maintenance. It is characterized by a highly efficient, compact design. The push chain consists of specially shaped links. The geometry of these links prevents buckling under push loads.

Accessories and equipment upon request see page 4


Versions Push chain direct system with single strand chain




Push chain direct system with double strand chain



Combination of push chain direct system with standard carrying console

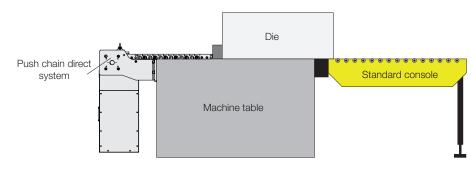

Push Chain Direct System with Single Strand Chain Code for part numbers • Technical data

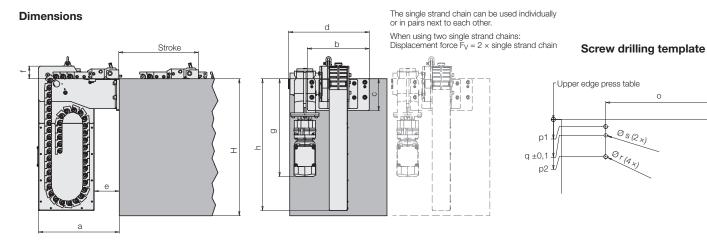

Technical data single strand chain

5,500	11.000	
	14,000	25,000
500	1,500	2,700
33	33	33
800-1800	900-1980	1500-3000
200	300	500
775	885	
457	620	
350	450	
180	240	
457	615	
142	160	+;
71	113	on request
553	703	edi
745	855	u u
300	400	U
20	20	
105	170	
45	90	
M12	M16	
10	12	
	230/400/50	
1.73/1.0	2.95/1.69	5.8/3.35
0.37	0.75	1.5
	IP 54	
	33 800-1800 200 775 457 350 180 457 142 71 553 745 300 20 105 45 M12 10 1.73/1.0	33 33 800-1800 900-1980 200 300 775 885 457 620 350 450 180 240 457 615 142 160 71 113 553 703 745 855 300 400 20 20 105 170 45 90 M12 M16 10 12 230/400/50 230/400/50 1.73/1.0 2.95/1.69 0.37 0.75

Delivery

- Adaptor plate for screwing onto the machine
- 1 x chain box
- 1 x drive motor
- 1 x push chain
- Fastening material

Special solutions on request

- Chain with claw guides
- Special stroke
- Chain case upwards
- Heavier die weights
- Higher displacement speeds
- Individual push-pull docking device

Accessories and equipment upon request From page 4

Important notes

1 = push-pull docking device with semi-automatic connection

2 = push-pull docking device, 2 pcs with safety bolts
3 = push-pull docking device with screw-on plate

With this design, it is necessary that the dies are guided with a tolerance of ± 2 mm.

* Maximum die weight is calculated on the basis of a factor of friction of 0.07 (use of roller/ ball bars according to data sheet WZ 8.18340).

Code for part numbers

You can easily configure the desired variant using the code for part numbers. You are provided with a dimension drawing for the selected configuration and can send us your chosen configuration directly for an offer to be prepared.

Push-pull docking device

Details see page 4

0 = without push-pull docking device

81836-X-X-X

Series_

- 05 = die weight up to 5,500 kg
- **14** = die weight up to 14,000 kg
- 25 = die weight up to 25,000 kg

Stroke

800 to **3000** See table "Technical characteristics"

Order example


Die/mould weight:	5,500	kg
Series:	05	
Stroke:	1,200	mm
With semi-automatic push-pull docking device	e: 1	
Part no. 81836-05-1200-1		


12-24 US – page 2

Push Chain Direct System with Double Strand Chain Code for part numbers • Technical data

b



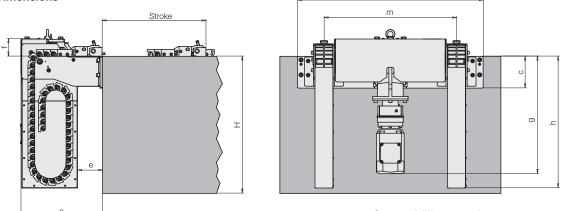



Technical data double strand chain 28 Series 11 40 Die weight Fg* 11,000 40,000 28.000 [kg] 5,400 Displacement force F_v 1,000 3,000 [kg] Displacement speed [mm/s] 33 33 33 Centre distance m [mm] 750-1500 1100-1800 1300-2000 800-1800 900-1980 1500-3000 Stroke [mm] 200 Stroke interval 300 500 [mm] Min. table height H 775 885 [mm] 457 620 [mm] а b m+300 m+400 [mm] С [mm] 180 240 142 160 е [mm] f 100 135 [mm] 664 810 [mm] g request h [mm] 745 855 m +260 m + 360 0 [mm] on 20 20 p1 [mm] p2 [mm] 105 105 рЗ 85 105 [mm] [mm] 45 45 q M16 r M12 Øs 10 [mm] 12 u [mm] 300 500 Motor voltage [V/Hz] 230/400/50 Nominal current [A] 2.95/1.69 5.80/3.35 11.4/6.6 Max. motor rating [kW] 0.75 1.5 3.0 Code class IP 54

Delivery

- Adaptor plate for screwing onto the machine
- Sheet metal cover to protect drive shafts
- 2 x chain box
- 1 x drive motor
- 2 x push chain

Special solutions on request

- Chain with claw guides
- Special stroke
- Chain case upwards
- Heavier die weights
- Higher displacement speeds
- Individual push-pull docking device

Accessories and equipment upon request

From page 4


Important notes

With this design, it is necessary that the dies are guided with a tolerance of ± 2 mm.

* Maximum die weight is calculated on the basis of a factor of friction of 0.07 (use of roller/ball bars according to data sheet WZ 8.18340).

Code for part numbers

You can easily configure the desired variant using the code for part numbers. You are provided with a dimension drawing for the selected configuration and can send us your chosen configuration directly for an offer to be prepared.

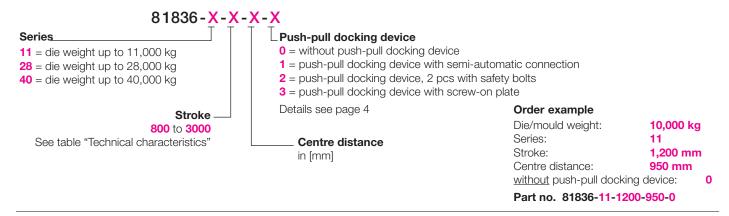


Position monitoring 1 (standard)

With position monitoring 1, the position of the back and front die position can be monitored via two inductive proximity switches.

Position monitoring 2

Alternatively, the die position can be monitored via a side-mounted rotary encoder (version with rotary encoder in combination with "Advanced" control). Each die position can be determined individually here.



Position monitoring 1 via two inductive proximity switches

Position monitoring 2 via one rotary encoder

Version without push-pull docking device

In this version, the unit is supplied with a front-end link. This allows for the adaptation of existing or self-designed push-pull docking devices.

Push-pull docking device with semi-automatic connection

The die is connected automatically and loosened manually.

Push-pull docking device, 2 pcs with safety bolts

For connecting the push-pull docking device and push-pull docking device block (bolted to the die)


The connection is secured by a locking bolt and can be removed manually when in neutral position. Equipped with push-pull docking device and push-pull docking device block.


Push-pull docking device with screw-on plate

This version facilitates a permanent connection between the push chain direct system and the base plate.


Fully automatic push-pull docking device


Connecting the dies to the push chain direct system is handled entirely by the control. Pneumatic or electric cylinders are used to activate the push-pull docking device when a predefined distance to the die is reached, enabling fully automated tool changes.

















Transfer plate

The chain must be supported by a transfer plate if it is lifted past the machine table.

Guide bars for fixing on the press table

To guide and centre the dies with the required accuracy, the press table can be equipped with guide bars. Special versions on request

Part no. 818448003

12-24 US - page 4

Electric Controls Versions

Electric controls for use on driven die changing systems

Driven die changing systems can be controlled by the customer using an existing machine control or a standard control from Römheld. We offer a ready for connection plug & play system that has been specially designed for controlling the driven carrying console or pull-push chain.

For optimum operation of the driven die changing systems, we recommend the following minimum requirements for control:

- Integration in the press emergency stop (terminal strip)
- Position monitoring: front and rear end position
- Wired remote control, soft start, deceleration ramp and overload protection
- Two speeds: Normal speed & creep speed

Depending on the degree of automation, we offer three different electric controls with corresponding operating units:

Basic control Required specifications
Input voltage flexible 400–480 V, 50/60 Hz, 3~ three-phase current
Voltage supply and signal exchange to the terminal strip (cable not included in delivery) For controlling 1 or 2 three-phase motors up to max. 1.5 kW
Connecting cable "control - drive unit" 10 m cable (1 cable per drive motor) permanently connected to the control and to the drive unit
End position control via inductive proximity switches
Standard remote control with 5 m cable, permanently connected to the control
Soft start, deceleration ramp and overload protection via speed starter (fixed setting)
Standard components for motors: KEB, speed starter: Phoenix, control box: Rittal (600 × 600 × 250 mm), UL-conform components
Safety Collective signal input "Release of press", emergency stop for press, two-channel (PL "D")
Possible options for Basic control
Safety remote control Sturdy housing, with panic buttons and dead man's switch (two-hand operation), connecting cable 5 m, O With safety remote control permanently wired to the control
Creep speed Additional switch on remote control for creep speed, 20 %

.

Electric Controls Versions

Advanced control like Basic, additionally with				
Connecting cable for power supply, 10 m, with open cable end, permanently connected to the control				
Connecting cable for signal exchange with the press, 10 m, with open cable end, permanently connected to the control unit				
Connecting cable "control - drive unit" 10 m cable (1 cable per drive motor) permanently connected to the control and to the drive unit				
Standard remote control with 5 m cable, connected to the control, insertable (Harting connector)				
Built-in PLC control module (Beckhoff) for an optional remote maintenance module and provision of the following contacts: - Signal to external "End position at the rear" (= drive/die completely out of the press in end position - Additional emergency stop signal contact				
Standard components Beckhoff control module, KEB motors, Phoenix speed starter, Rittal control box 600 × 600 × 250 mm), UL-compliant components				
Safety Collective signal input "Release of press", emergency stop for press, two-channel (PL "D")				
Possible options for Advanced control				
Safety remote control Sturdy housing, with panic buttons and dead man's switch (two-hand operation), connecting cable 5 m, connected to the control, insertable (Harting connector)	With safety remote control			
Creep speed Additional switch on remote control for creep speed, 20 %	With creep speed			
Remote maintenance box with SIM card (also available as a loan if needed) Remote maintenance options, e.g. via remote maintenance box	With remote maintenance box loan buy			
Advanced Plus control like Advanced, with additional options:				
Advanced Plus control like Advanced, with additional options.				
Radio remote control	With radio remote control			
Display package: 3.5" display panel on the control box with text display of function and fault signals, programming of stopping points in conjunction with absolute rotary encoders on each drive	With display package			
 Signal exchange package: Available individually on terminal strip Release signal 1 (e.g. "roller bars lifted") Release signal 2 (e.g. "press/ram in top dead centre") Release signal 3 (e.g) Ext. signal "Die position 1" (from here onwards, retracting speed at creep speed 20 %) Ext. signal "Die position 2" (STOP retraction movement, end position in the press reached) 	O With signal exchange package			

Control unit

Control box: Rittal (600×600×250 mm)



.

Standard remote control



Safety remote control Sturdy housing, with panic buttons and dead man's switch (two-hand operation)



Display package 3.5" panel on control box



12-24 US - page 6

ROEMHELD North America

Subject to modifications